


Laura

General Characteristics

- Wide Range of Applications! Most suitable for commercial and industrial premises with over 4 meters high ceilings, such as shopping mall, shopping center, office, airport, indoor gymnasium, warehouse, factory, etc.
- Distinctive Square Appearance. Concise and flat design, large light-emitting area.
- Unique square and flat design saving packaging cost.

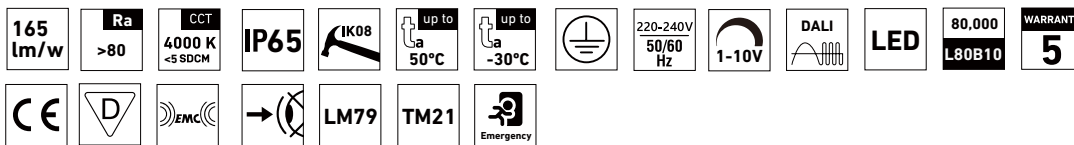

Mechanical

Structure: Die casting ADC12
 Lens: Polycarbonate (PC)
 Installation: Suspended / Ceiling Mounted/ Wall Mounted
 Color: White
 Ingress protection: IP65
 IK resistance: IK08
 Ambient temperature: -30°C to +50°C

Electrical




Input: 220-240VAC (50/60Hz)
 Power factor: ≥ 0.95
 THD: <20%
 Safety class: Class I
 Surge protection: 4KV/ 2KV (Driver)

Other control

Sensing: MW/PIR sensor/Emergency Pack
 Communication: 1-10V/DALI

Application

Logistics, Manufacturing, Retail, Industry, Warehouse

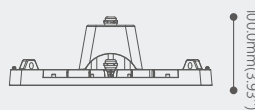

Type	Power [W]	Total Flux [lm]	Efficacy [lm/w]	Beam angle [°]	Ta Max.: [°C]	Size [mm]	Net weight [kg]
IL-HB25-N10040-75	101.8	17214	169.1	75	50	425*320*100	4.2
IL-HB25-N15040-75	152.3	25616	168.2	75	50	425*320*100	4.4
IL-HB25-N20040-75	204.8	34160	166.8	75	50	425*320*100	5.6