


Lina

General Characteristics

- 3-Power-in-1, 3-Beam Angle-in-1.
- Special asymmetrical beam angle, for replace linear High Bay.
- Optional Built-in Smart Control Modules, easy and friendly installation.

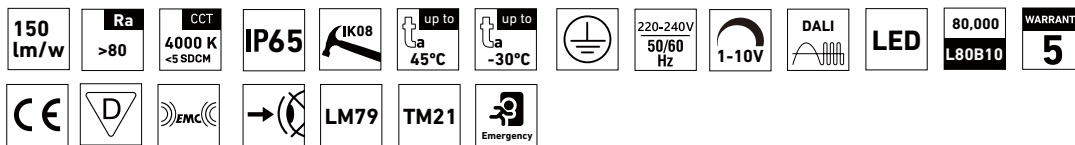

Mechanical

Materials : Die casting ADC12
 Lens: PC
 Color: Black RAL9017
 Installation: Suspending / Ceiling
 Mounting / Wall Mounting
 Ingress protection: IP65
 Ingress protection: IK08
 Ambient temperature: -30°C ~ +45°C

Electrical


Input: 220-240VAC (50/60Hz)
 Power factor: >0.90
 THD: <20%
 Safety class: Class I
 Surge protection:
 4KV/ 2KV

Other control

Sensing: MW sensor/Zhaga/Zig-
 bee/Bluetooth

Application

Industry, Warehouse, Workshop,
 Retail

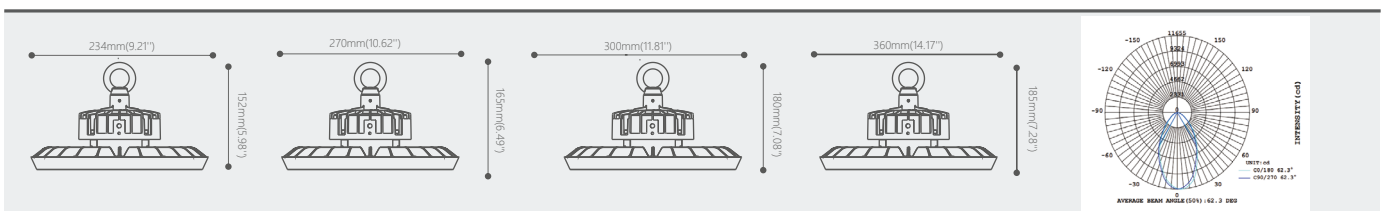

Type	Power [W]	Total Flux [lm]	Efficacy [lm/w]	Beam angle [°]	Ta Max.: [°C]	Size [mm]	Net weight [kg]
IL-HB12-L10040-691	100.5	15014	149.4	60	45	234*152	1.4
	101	15082	149.3	90	45		
	100.5	15135	150.6	105	45		
IL-HB12-L15040-691	150.3	22454	149.4	60	45	270*165	1.7
	150.1	22558	150.2	90	45		
	152	22906	150.7	105	45		
IL-HB12-L20040-691	200.8	30015	149.4	60	45	300*180	2.1
	200.3	30070	150.1	90	45		
	200.3	30180	150.6	105	45		
IL-HB12-L24040-60	240	35910	149.6	60	45	360*185	3.1
IL-HB12-L24040-90	239.8	35958	149.9	90	45		
IL-HB12-L24040-110	239.6	35884	149.8	110	45		