


Ida

General Characteristics

- 3 CCT: choose your colour temperature on site by sliding the switch.
- 3 Lumen outputs: set the lumen package on site by sliding the switch.
- Opal diffuser for uniform light effect and visual comfort.
- IP65: for exterior applications
- IK10: robust construction IK10 impact resistance.
- Optional with 3hrs emergency kit and sensor option (self test with manual option).
- Easy to program sensor version via DIP switches directly on the sensor. To suit a variety of indoor and outdoor applications.

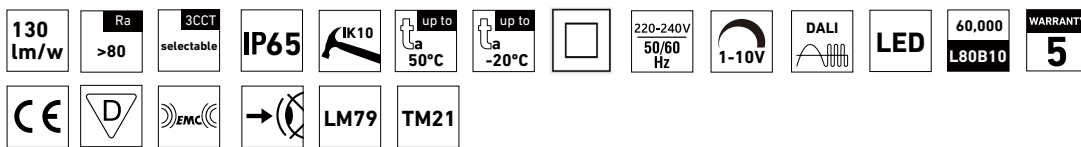

Mechanical

Body: PC
 Diffuser: PC
 Installation: Surface mounted
 Color: White RAL9003/ Black RAL9017
 Ingress protection: IP65
 IK resistance: IK10
 Ambient temperature: -20°C~+50°C
 (EM 0°C~+50°C)

Electrical


Input: 220-240VAC (50/60Hz)
 Power factor: >0.92
 THD: <20%
 Safety class: Class II
 Risk group: RG0 (exempt)

Other control

Sensing: 0-10V/DALI/Microwave
 Sensor+Daylight /Photocell

Application

Industrial Environments, Parking
 Garages, Residential areas, Commer-
 cial areas, Healthcare and hospitality,
 Staircases

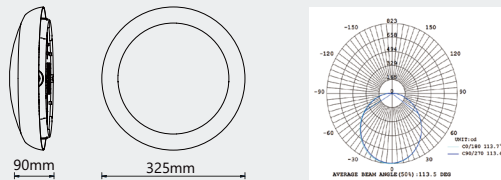

Type	Power [W]	Total Flux [lm]	Efficacy [lm/w]	CCT (K)	Beam angle [°]	Ta Max.: [°C]	Size [mm]	Net weight [kg]
IL-CL18-N0163C-110	16.75	2061.2	123.1	2700	110	50	325*325*90	0.8
	16.37	2242.8	136.9	3000	110	50	325*325*90	0.8
	17.05	2307.4	135.3	4000	110	50	325*325*90	0.8
IL-CL18-N0203C-110	21.17	2516.5	118.9	2700	110	50	325*325*90	0.8
	20.58	2748.4	133.5	3000	110	50	325*325*90	0.8
	21.62	2808.5	129.9	4000	110	50	325*325*90	0.8
IL-CL18-N0253C-110	25.01	2874.7	114.9	2700	110	50	325*325*90	0.8
	24.28	3152.9	129.9	3000	110	50	325*325*90	0.8
	25.76	3208.1	124.5	4000	110	50	325*325*90	0.8