


Mila

General Characteristics

- Durable Construction: Mading of die-cast aluminum, it's impact-resistant and very strong.
- SMD LED technology, high reliability, strong vibration resistance, low solder joint defect rate.
- Advanced aluminum heat sink for optimal heat dissipation and extended lifespan.
- Lifespan exceeds 80,000 hours.
- 3 CCT adjustable: 2700K/3000K/4000K
- Cut out size: ϕ 130mm (5 inch)/ ϕ 165mm (6 inch) / ϕ 200mm (8 inch)
- Space Efficiency: Since they are recessed into the ceiling, they do not take up space in the room, making them suitable for areas with limited space.

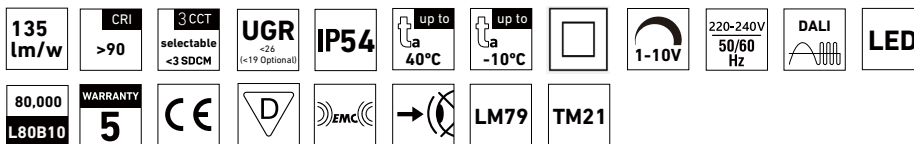

Mechanical

Materials : ADC 12 structure
 Diffuser: PMMA
 Installation: Recessed
 Color: Black+white
 Ingress protection: IP54
 Ambient temperature: -10°C to +40°C

Electrical



Input: 220-240VAC (50/60Hz)
 Power factor: >0.9
 THD: <20%
 Safety class: Class II
 Surge protection: /

Other control

Sensing: /
 Communication: 1-10V/DALI

Application

Hotel, Shopping mall, Workshop, Corridors

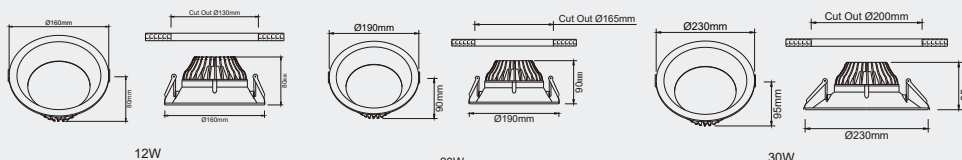

Type	Power [W]	Total Flux [lm]	Efficacy [lm/w]	CCT (K)	CRI	Beam angle [°]	Ta Max.: [°C]	Size [mm]	Cut-off size [φ mm]	Net weight [kg]
IL-DL17-N0123C-100	12.37	1194	96.5	2700	>90	100	40	φ 160*80	130	0.28
	11.73	1304.6	111.2	3000	>90	100	40			
	12.24	1251.3	102.2	4000	>90	100	40			
IL-DL17-N0203C-100	19.91	2397.1	120.4	2700	>90	100	40	φ 190*90	165	0.31
	19.15	2550.7	133.2	3000	>90	100	40			
	19.59	2472.1	126.2	4000	>90	100	40			
IL-DL17-N0303C-100	32.41	3838.6	118.4	2700	>90	100	40	φ 230*95	200	0.35
	30.65	4133	134.8	3000	>90	100	40			
	31.8	3977.4	125	4000	>90	100	40			